


ResCom™ Ceiling Installation



magnesiumoxide
boardcorporation

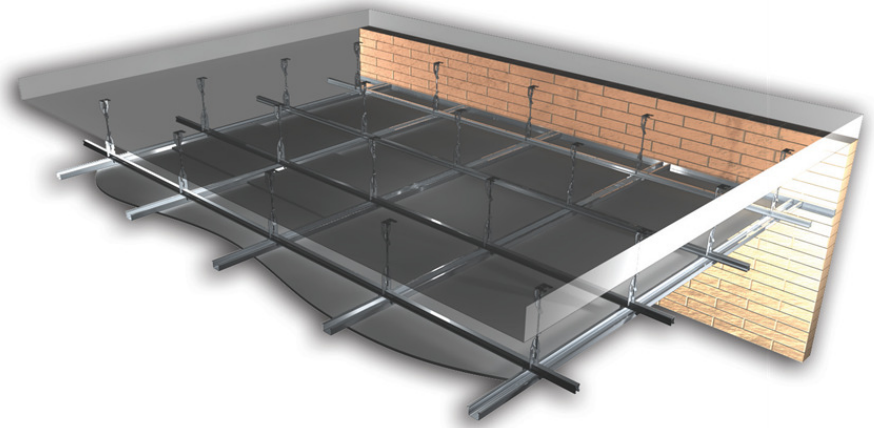

- Fixings will be class 3 to 5 (non corrosive) No. 8x40 self-drilling countersunk screws or non-corrosive nails fixed at maximum 300mm centres, and will finish at approximately 0.5mm below the surface.

1. Concrete ceiling slab.
2. One layer of ResCom^R Ceiling Board.
3. Overlapping layer of ResCom^R Ceiling Board mounted from top using appropriate structural polyurethane adhesive full length beads to frame surfaces.
4. Solid wall.
5. Concrete suspension clip.
6. Suspension rod.
7. Suspension top rail clip.
8. Top cross rail.
9. Furring channel.
10. Top furring channel.
11. Back blocking to joints to eliminate thermal breach

